

Type OCT7-1B3J-RD65

Frequency Range	694-960x1 1695-2690x3
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x3

Base Station Antenna

8-ports 690-960 / 1695-2690 / 1695-2690/1695-2690 MHz 65°, 16 / 18 / 18 / 18dBi, 2°-12° / 2°- 12° / 2°- 12° / 2°- 12°
Tilt Antenna With 4 Integrated RCUs.

Electrical Specifications

Frequency Range(MHz)		694-960			3X1695-2690				
		694-806	790-894	880-960	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		±45°							
Horizontal 3dB Beamwidth(°)		68±3.6	66±3.6	64±3.6	68±6.5	66±6.1	64±6.1	62±5.1	62±5.9
Vertical 3dB Beamwidth(°)		11.6±0.8	10.2±0.9	9.3±0.9	6.8±0.6	6.3±0.5	5.9±0.5	5.2±0.4	4.8±0.6
Gain (dBi)		15.0±0.5	15.4±0.5	15.8±0.5	16.4±0.6	16.8±0.5	17.3±0.5	17.7±0.6	18.2±0.6
Electrical Downtilt		2°-12°			2°-12°				
Upper Sidelobe Suppression(dB)	First	≥16	≥16	≥16	≥16	≥16	≥16	≥16	≥16
Front-to-Back Ratio Total Power, ±30° (dB)		≥25	≥25	≥25	≥25	≥25	≥25	≥26	≥26
Cross polar ratio	Main direction(dB)	≥17	≥17	≥17	≥17	≥17	≥17	≥17	≥17
	±60° (dB)	≥10	≥10	≥10	≥8	≥8	≥8	≥8	≥8
Isolation ports		≥27 dB			≥27 dB				
Isolation Frequency		≥28 dB							
VSWR		< 1.5							
Intermodulation IM3		< -153			< -153				
Impedance		50 Ω			50 Ω				
Max. Power per Input (at 50°C ambient)		500 W			250 W				
Lightning Protection		DC Ground							



Mechanical Specifications

Radome Material	Fiberglass
Connector Type and Location	4.3-10x8, Bottom iRCU in:1 x 8 pin male iRCU out:1 x 8 pin female
Dimensions,HxWxD(mm)	1995 x 380 x 156
Packing Size(mm)	2205 x 470 x 250
Weight ,w/o Mounting kit(kg)	23.5
Weight w/ Downtilt Bracket(kg)	27.5
Packing Weight (w/ Downtilt Bracket) (kg)	32.0
Max. Wind Velocity(mph)	150
Mounting hardware	Φ 50 mm ~ Φ 115 mm
Operational Temperature(°C)	-40 to +65
Operational Humidity(%)	<95
Wind Load at 150km/h (Frontal/lateral/Rearside(N))	900/240/978

This publication is issued to information only and is not to form part of any order or contract DENGYO reserves the right to changes specifications without prior notice.


Type OCT7-1B3J-RD65

Frequency Range	694-960x1 1695-2690x3
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x3

Integrated RET Properties

RET Type	3 x Type 1 Single RET	
Protocols	Compliant to AISG 3.0/3GPP	
Input voltage range	+10~+30VDC(pin 6)	
Power consumption	<2W(stand by);<10W(motor activated)	
Connectors	AISG	2 x 8 pin connector acc. To IEC 60130-9 Acc.to AISG Daisy chain in:male Daisy chain out:female
	Antenna	Two motor shaft(Embedded motor)
Hardware interface	AISG	RS485A/B(pin5/pin3);Power supply(pin6); DC return(pin7)Acc.to AISG
Adjustment time(full range)	40 sec(typically,depending on antenna)	
Adjustment Cycles	≥10000	
Torque Max	≥160mN.m	
Lightning Protection Rating	IEC 61000-4-5 Current Pulse Profile,8/20 μs 10 Repetitions Min.@ 6kA IEC 61312-1 Annex B Current Pulse Profile, 10/350 μs,200 Repetitions Min. @ 0.6KA	

COMPREHESIVE TILT CONFIGURATION

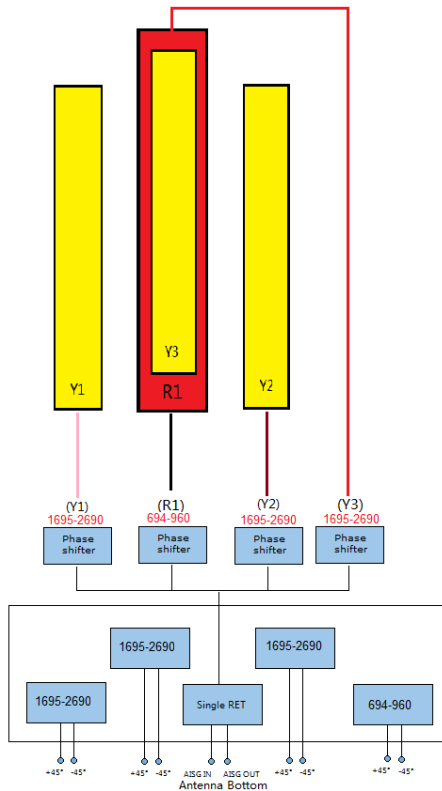


Frequency Range	Array	RET Unique ID
694-960MHz	R1	NDPMXXXXXXXX-7090R1
1695-2690MHz	Y1	NDPMXXXXXXXX-1727Y1
1695-2690MHz	Y2	NDPMXXXXXXXX-1727Y2
1695-2690MHz	Y3	NDPMXXXXXXXX-1727Y3

Note: (1) Physical RET Unit
containing (4) Single RET


Type OCT7-1B3J-RD65

Frequency Range	694-960x1 1695-2690x3
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x3

Radiation Pattern (694 - 894 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Patterns (894 - 960 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Pattern (1695 - 2200 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Patterns (2490 - 2690 MHz)



Horizontal Pattern



Vertical Pattern