


Frequency Range	698-960x2 1695-2690x2
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x4

Type OCT7-2B2J-RD65

Base Station Antenna

8-ports 698-960 / 698-960 /1695-2690 /1695-2690 MHz 65°, 17 / 17 / 18 / 18 dBi, 2°-12° / 2°-12° / 2°-12° / 2°-12°
Tilt Antenna With 4 Integrated RCUs.

Electrical Specifications

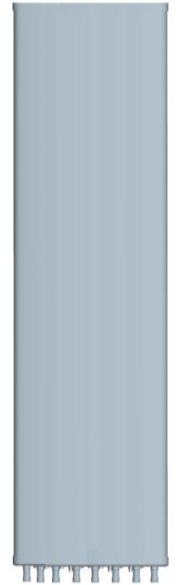

Frequency Range(MHz)		2x698-960		2x1695-2690		
		698-894	880-960	1695-1920	1920-2180	2490-2690
Polarization		±45°				
Horizontal 3dB Beamwidth(°)		67±5	64±5	68±5	64±5	62±5
Vertical 3dB Beamwidth(°)		10±1.5	8.6±0.7	7.0±0.6	6.2±0.6	5.5±0.6
Gain (dBi)		15.3±0.5	15.7±0.5	16.8±0.5	17.2±0.5	18.2±0.5
Electrical Downtilt		2°-12°		2°-12°		
Upper Sidelobe Suppression(dB)	First	≥17	≥17	≥16	≥16	≥16
Front-to-Back Ratio Total Power, ± 30° (dB)		≥25	≥25	≥25	≥25	≥25
Cross polar ratio	Main direction(dB)	≥17	≥17	≥17	≥17	≥17
	± 60° (dB)	≥7	≥7	≥7	≥7	≥7
Isolation ports(dB)		≥25				
Isolation Frequency(dB)		≥28				
VSWR		< 1.5				
Intermodulation IM3		< -150 dBc(2x43dBm carrier)				
Impedance		50 Ω				
Max. Power per Input (at 50°C ambient temperature)		500 W		300 W		
Lightning Protection		DC Ground				

Mechanical Specifications

Radome Material	Fiberglass
Connector Type and Location	4.3-10x8 ,Bottom iRCU in:1 x 8 pin male iRCU out:1 x 8 pin female
Dimensions,HxWxD(mm)	1995 x 446 x 165
Packing Size(mm)	2210 x 535 x 270
Weight ,w/o Mounting kit(kg)	22.5
Weight w/ Downtilt Bracket(kg)	29.5
Packing Weight (w/ Downtilt Bracket) (kg)	35.5
Max. Wind Velocity(mph)	150
Mounting hardware	Φ 50 mm ~ Φ 115 mm
Operational Temperature(°C)	-40 to +65
Operational Humidity(%)	<95
Wind Load at 100mph (Frontal/lateral/Rearside(N))	1230/240/1295


Frequency Range	698-960x2 1695-2690x2
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x4

Type OCT7-2B2J-RD65

Integrated RET Properties

RET Type	4x Type 1 Single RET	
Protocols	Compliant to AISG 2.0/3GPP	
Input voltage range	+10~+30VDC(pin 6)	
Power consumption	<2W(stand by);<13W(motor activated)	
Connectors	AISG	2 x 8 pin connector acc. To IEC 60130-9 Acc.to AISG Daisy chain in:male Daisy chain out:female
	Antenna	Two motor shaft(Embedded motor)
Hardware interface	AISG	RS485A/B(pin5/pin3);Power supply(pin6); DC return(pin7)Acc.to AISG
Adjustment time(full range)	40 sec(typically,depending on antenna)	
Adjustment Cycles	≥10000	
Torque Max	≥160mN.m	
Lightning Protection Rating	IEC 61000-4-5 Current Pulse Profile,8/20 μs 10 Repetitions Min.@ 6kA IEC 61312-1 Annex B Current Pulse Profile, 10/350 μs,200 Repetitions Min. @ 0.6KA	

COMPREHENSIVE TILT CONFIGURATION

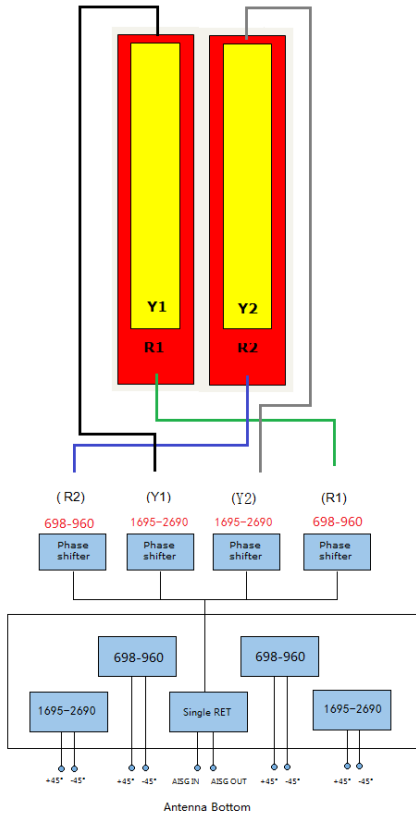


Frequency Range	Array	RET Unique ID
698-960MHz	R1	NDPMXXXXXXXXX-7090R1
698-960MHz	R2	NDPMXXXXXXXXX-7090R2
1695-2690MHz	Y1	NDPMXXXXXXXXX-1727Y1
1695-2690MHz	Y2	NDPMXXXXXXXXX-1727Y2

Note: (1) Physical RET Unit
containing (4) Single RET


Frequency Range	698-960x2 1695-2690x2
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	2° - 12°x4

Type OCT7-2B2J-RD65

Radiation Pattern (698 - 824 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Patterns (824 - 894 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Pattern (1695 - 2180 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Patterns (2300 - 2400 MHz)




Horizontal Pattern




Vertical Pattern

Radiation Pattern (2490 - 2690 MHz)



Horizontal Pattern



Vertical Pattern